

# **COMPACT M 12**

## TWO-WAY PROFESSIONAL SPEAKER



### Description

COMPACT M 12 is a multipurpose two-way full-range speaker system, suitable for a wide range of applications. Its balanced sound is a big asset in near-field applications for the best intelligibility. The M 12 features high sensitivity, typical of professional audio cabinets thanks to the use of oversized magnets and a HI-FI sound quality, with smooth and wide frequency response, thanks to the wave-guided compression driver. The SPL level of low-distortion audio the M 12 can provide goes far beyond expectations of such a compact solution. The elegant and compact design with accurate finishing makes M 12 suitable for almost any environment, even with architectural constraints. Optional mounting accessories allow using M 12 on wall or ceiling installations.

#### Features

- > 300 W RMS power handling
- > 129 dB max SPL
- > 55 ÷ 20000 Hz frequency range
- > 90° x 70° constant directivity coverage angle
- > 1 x 12" high power woofer
- > 1 x 1.4" voice coil compression driver
- > High quality plywood cabinet
- > Steel front grille with clothing
- > Installation points available on rear, top and bottom panels
- > 4 pole EUROBLOCK connector (audio input and parallel link output)

### **Part Number**


13000596 COMPACT M 12 13000724 COMPACT M 12 W Black - RAL 9005 EAN 8024530017811 White - RAL 9003 EAN 8024530019365



# **COMPACT M 12**

## TWO-WAY PROFESSIONAL SPEAKER

### Line Art 2D

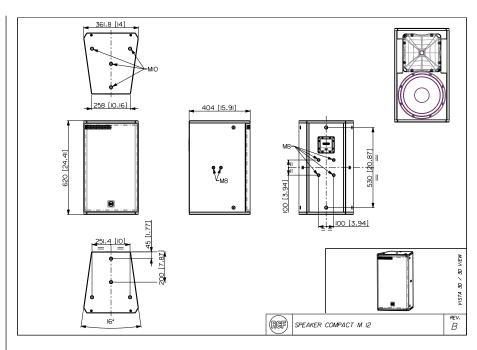

#### **TECHNICAL SPECIFICATIONS**

**Acoustical specifications** 

Standard compliance

Size

Frequency Response (-10dB) 55 Hz ÷ 20000 Hz

Max SPL @ 1m129 dBHorizontal coverage angle90°Vertical coverage angle70°Directivity index Q9

System Sensitivity 98 dB

Power sectionAmplificationFull RangeNominal Impedance8 ohmPower Handling300 W

Peak Power Handling 1200 W PEAK

Protections Dynamic active mosfet

Crossover Frequencies 1800 Hz

Recommended Amplifiers XPS 16K, XPS 16KD, QPS 10K, QPS 6.0K, IPS 5.0K, IPS 2.5K, IPS

1.5K, DMA 504

**Transducers** Compression Driver 1 x 1.0", 1.4" v.c

Woofer 1 x 12", 2.5" v.c

Input/Output section | Input connectors | Euroblock

Output connectors Euroblock
Safety agency CE compliant

Physical specificationsCabinet/Case MaterialPlywoodHardware8 x M8, 8 x M10

Grille Steel with clothing

Color Black - RAL 9005, White - RAL 9003

 Height
 620 mm / 24.41 inches

 Width
 362 mm / 14.25 inches

 Depth
 404 mm / 15.91 inches

 Weight
 22 kg / 48.5 lbs

ACCESSORIES

**Rigging / Mounting** | H-BR 003 13360538 8024530021337

Technical Specifications Page 2 of 3



**Rigging / Mounting** SWM-BR NC 13360199 8024530007355

 V-BR 002
 13360533
 8024530021320

 WM-BR 001
 13360539
 8024530021344

 Upgrade Kits
 PNL IN-OUT AMPHENOL
 12399063
 8024530020149

 PNL IN-OUT SPEAKON
 12399062
 8024530018733

Technical Specifications Page 3 of 3