



MR 50T

PAIR OF TWO-WAY SPEAKERS WITH LINE TRANSFORMER



Description

MR 50T is a bass-reflex two-way speaker designed to deliver uncompromised audio performance and high reliability in fixed installations. Blend in with any environment and deliver deep bass, smooth midrange, and finely-detailed high-frequency response. Quality components and careful acoustic design make MR 50T the perfect speaker for listening in the most demanding applications. Suitable for indoor and outdoor installation.

Features

- › 60 W (8 ohm) / 40 W - 20 W - 10 W - 5 W (70/100V) power handling
- › 110 dB max SPL
- › 60 ÷ 20000 Hz frequency range
- › 110° x 100° coverage angles
- › 1 x 5" woofer (1" v.c.)
- › 1 x 1" dome tweeter (0.8" v.c.) neodymium magnet
- › Colour black RAL 9005 and white RAL 9003
- › IP 55 protection grade
- › Swivel wall mount accessory included
- › 4 pole EUROBLOCK connector

Part Number


| | | | | |
|----------|----------|------|------------------|-------------------|
| 13100039 | MR 50T | 8ohm | Black - RAL 9005 | EAN 8024530017286 |
| 13100041 | MR 50T W | 8ohm | White - RAL 9003 | EAN 8024530017309 |



MR 50T

PAIR OF TWO-WAY SPEAKERS WITH LINE TRANSFORMER

Line Art 2D

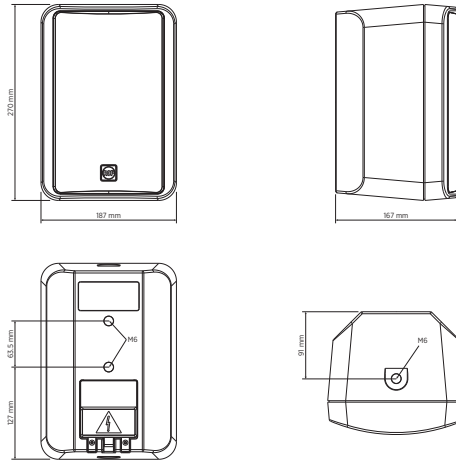

TECHNICAL SPECIFICATIONS

| | | |
|----------------------------------|--------------------------------|------------------------------------|
| Acoustical specifications | Frequency Response (-10dB) | 60 Hz ÷ 20000 Hz |
| | Max SPL @ 1m | 110 dB |
| | Horizontal coverage angle | 110° |
| | Vertical coverage angle | 100° |
| | Directivity index Q | 7 |
| Power section | System Sensitivity | 87 dB |
| | Nominal Impedance | 8 ohm |
| | Power Handling | 60 W |
| | Peak Power Handling | 240 W PEAK |
| | Protections | Bulb lamp |
| Transducers | Crossover Frequencies | 3000 Hz |
| | Recommended Amplifiers | DMA 504, DMA 162, DMA 82, DMA 162P |
| | Dome Tweeter | 1 x 1.0" neo, 0.8" v.c |
| | Woofer | 1 x 5.0", 1.0" v.c |
| | Input/Output section | Input connectors |
| Output connectors | | Euroblock |
| Constant Voltage Transformer | | 70/100 V |
| Power selection 1 | | 40 W - 250 ohm |
| Power selection 2 | | 20 W - 500 ohm |
| Standard compliance | Power selection 3 | 10 W - 1000 ohm |
| | Power selection 4 | 5 W - 2000 ohm |
| | IP protection grade | IP 55 |
| | Safety agency | CE compliant |
| | Physical specifications | Cabinet/Case Material |
| Hardware | | Wall mount bracket |
| Grille | | Aluminium |
| Color | | Black - RAL 9005, White - RAL 9003 |



MR 50T

PAIR OF TWO-WAY SPEAKERS WITH LINE TRANSFORMER

| | | |
|-------------|--------|-----------------------|
| Size | Height | 270 mm / 10.63 inches |
| | Width | 187 mm / 7.36 inches |
| | Depth | 167 mm / 6.57 inches |
| | Weight | 4 kg / 8.82 lbs |

ACCESSORIES

| | | | |
|---------------------------|------|----------|---------------|
| Rigging / Mounting | MA 5 | 13360369 | 8024530014322 |
| | MA 5 | 13360370 | 8024530014339 |